

# Hi-Lift 1L & 2L



## CONDENSATE REMOVAL PUMP

The world's only persitaltic tank pump offers unsurpassed high head and unmatched reliability.



11L/h max. flow





12m max. head  
(flow rate 11L/h)

### Key Features


- High head
- Easy fit & maintenance
- Easy access clean tray
- Built in spirit level

### Suitability

- Up to 14kW (47,000 Btu/h)
- Ducted units; Floor standing & Chassis units; Cassette units; Refrigerated units/cold store
- **Perfect for...** High head applications

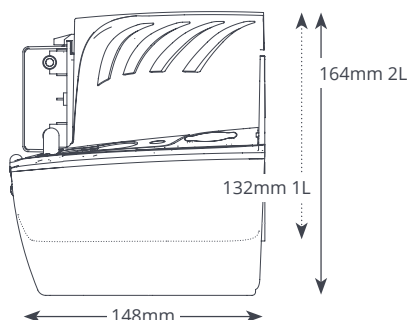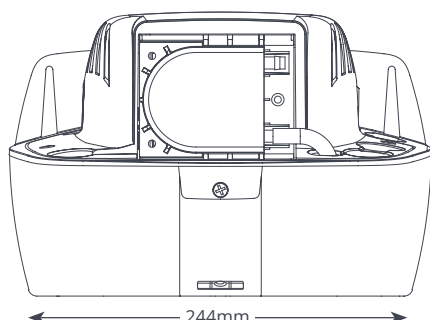

@ 230 VAC 50Hz	
Max. flow	11L/h @ 0m head
Max. head.	12m
Tank capacity	1L & 2L
dB(A) @1m	51dB(A)
Power supply	230 VAC, 50-60Hz, 0.4A
Rated	Continuously
Class	I
Max. unit output	14kW (47,000 Btu/h)
Max. water output	40°C (104°F)
Inlet/Outlet	3x 25mm in, 6mm out
IP Protection	IP20
Safety Switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

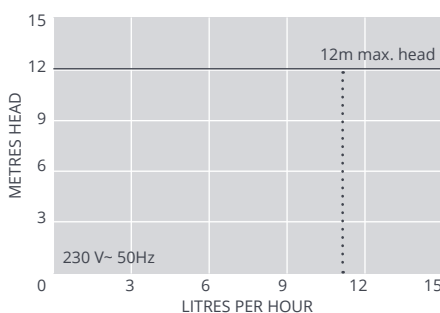

OPTIONS	
Hi-Lift 1L	FP2099/2
Hi-Lift 2L	FP2071/2

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
Tank pump connector 16mm-21mm	FP2011
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5110



Visit [aspenpumps.com](http://aspenpumps.com) for more installation accessories.

### IN THE BOX

Hi-lift 1L or 2L pump • 2m Plug & Play power cable • Fixing kit • Install manual

Download manual at [aspenpumps.com](http://aspenpumps.com)