

# Mini Tank

## CONDENSATE REMOVAL TANK PUMP



The new and improved Mini Tank pump can be wall mounted, floor mounted, in-pan or suspended on rod between 5/16" and 3/8" in diameter. Using piston technology this is a compact, powerful and multi functional tank pump.

9 US Gal/h / 35L/h max. flow

39ft / 12m max. rec. head (flow rate 2.6 US Gal/h / 10L/h)

### KEY FEATURES




- Four ways to install
- Compact & discreet
- Can be located in drain pan
- Easy maintenance

### SUITABILITY

- Up to 12ton / 157,000Btu/h
- Ducted units; Floor standing & chassis units; Cassette units
- ✓ Perfect for... Installation versatility





20 oz / 0.57 kg

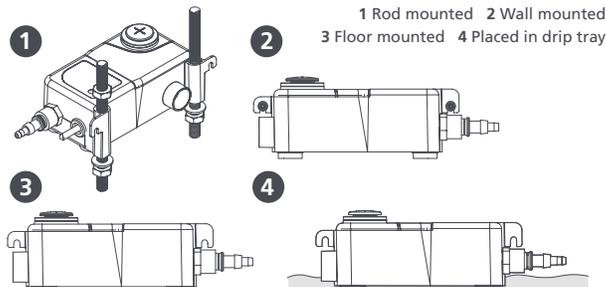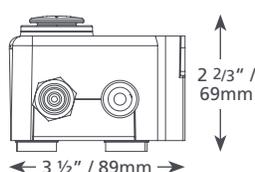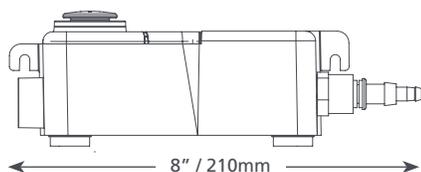

MINI TANK @ 230 VAC 60Hz	
Max. flow @ 0 head	9 US Gal/h / 35L/h
Max. rec. head	39ft / 12m
Tank capacity	0.06 US Gal / 0.24L
dB(A) @ 3ft / 1m	35
Power supply	230 VAC, 0.1A, 16W, 50/60Hz
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	12ton / 157,000Btu/h
Max. water temp	104°F / 40°C
Inlets	2x 3/4" / 22mm, 1/2" / 2mm & 1 1/8" / 27mm
Outlets	1/4" / 6mm & 3/8" / 10mm
IP Protection	IP65
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓

MINI TANK OPTIONS	
Mini Tank	FP1056/RS
IN THE BOX	
Mini Tank pump (including hard wired 39" / 1m power cable) • 2x Rubber adaptors (3/4" / 21.5mm & 1 1/4" / 31mm) • Anti siphon device • Inline Fuse • Fixing kit • Install manual	

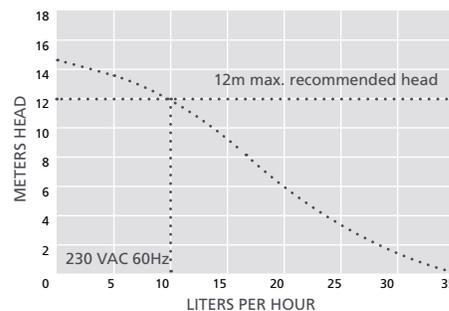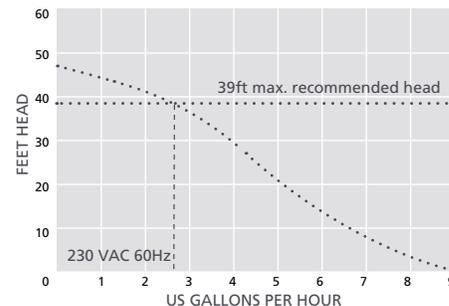

▶ View install video at [aspenspumps.com](http://aspenspumps.com)

Information correct at time of going to press.